



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :

H04N 7/10, 7/00

A1

(11) International Publication Number:

WO 97/31480

(43) International Publication Date:

28 August 1997 (28.08.97)

(21) International Application Number: PCT/US97/02888

(22) International Filing Date: 26 February 1997 (26.02.97)

(30) Priority Data:

60/012,303	26 February 1996 (26.02.96)	US
60/012,968	7 March 1996 (07.03.96)	US
60/027,671	7 October 1996 (07.10.96)	US

(71) Applicant (for all designated States except US): E GUIDE, INC. [US/US]; c/o Schneider, Goldberg, Rohatiner & Yuen, 5th floor, 9100 Wilshire Boulevard, Beverly Hills, CA 90212 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): YUEN, Henry, C. [US/US]; P.O. Box 1159, Redondo Beach, CA 90278 (US).


(74) Agents: RAHN, LeRoy, T. et al.; Christie, Parker & Hale, L.L.P., P.O. Box 7068, Pasadena, CA 91109-7068 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.  
With amended claims.

(54) Title: CORDLESS PHONE BACK LINK FOR INTERACTIVE TELEVISION SYSTEM

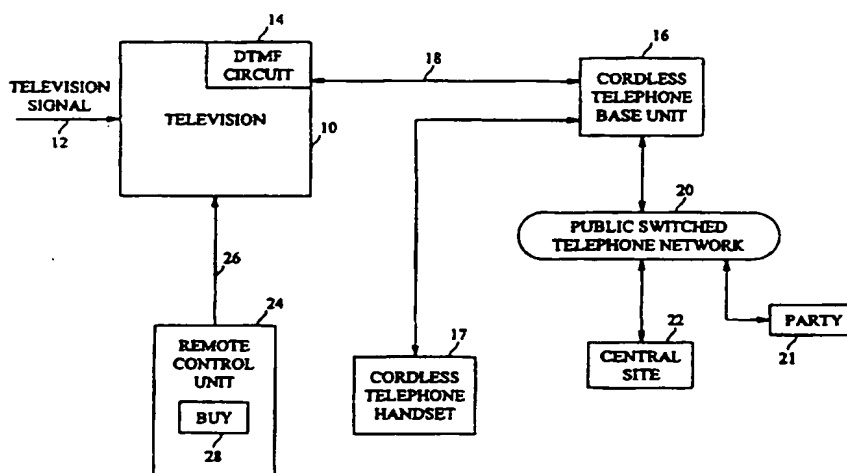

## (57) Abstract

A system for communicating information from a television viewer to a central site (22) includes a remote control unit (24) for sending command signals from the viewer to a television (10) or video cassette recorder (VCR). A cordless telephone base unit (16) initiates a telephone call to the central site (22) and communicates the DTMF tone signals received from the DTMF circuitry (14) in the television (10) or VCR to the central site (22). The television (10) or VCR receives a television signal (12) and extracts information related to a product or pay-per-view (PPV) event being advertised on a television program from the vertical blanking interval of the television signal. This information includes the telephone number of the central site used for making the telephone connection as well as identification information for the product of PPV event to be purchased.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## CORDLESS PHONE BACK LINK FOR INTERACTIVE TELEVISION SYSTEM

### Field of the Invention

This invention relates generally to television and telephone systems and more specifically to an interactive television system integrated with cordless phone circuitry to allow automatic telephonic communication between the interactive television system and a central site.

### Background of the Invention

An emerging trend in the marketing of cable television and digital satellite systems (DSS) is to emphasize Pay-Per-View (PPV) television programming as a source of revenue. An ideal PPV television system should allow a viewer to purchase the right to watch a television program such as a movie, sporting event, or other special event through a minimal amount of effort on the part of the viewer. For example, after watching a short preview or advertisement of a PPV program, the viewer could gain access to the PPV program simply by pressing a selected button on the viewer's remote control unit for a television or video cassette recorder (VCR). In another example, the viewer is watching an informational commercial ("infomercial") or a home shopping program and the viewer desires to purchase an advertised product by pressing a selected button on the remote control unit. In existing television systems, in order for the viewer to arrange for PPV program access, the viewer must go to the viewer's telephone, call the PPV program provider (such as the cable company) and enter his or her cable box serial number, credit card number and PPV program identifier. The PPV program provider then enables the cable box to display the selected PPV program to the viewer. In the home shopping situation, the viewer must write down the advertiser's telephone number and product identifier, go to the telephone, call the advertiser or a home shopping service provider, and then communicate the required credit card and product selection information to an operator.

In more recent systems using digital set top boxes (such as DSS), the set top box itself is directly connected to a telephone line in the viewer's home and the remote control unit includes a button for ordering a PPV program. When the button is pushed by the viewer, the telephone number of the PPV program provider is automatically dialed and the box identifier and PPV program identifier are automatically transmitted over the telephone connection to the PPV program provider. In this scenario, the viewer must establish a credit card account with the PPV program provider for billing purposes prior to pushing the button to select a PPV program. A major drawback to effective operation of these systems is the requirement that the set top box and television must be close to a telephone jack in the viewer's home, because of the direct connections by wire between the set top box, the television and the telephone jack. In many homes, the television is not in close proximity to a telephone jack, nor even in the same room,

1  
thereby rendering such systems unsuitable for widespread use. An interactive television system  
overcoming this drawback would have considerable value in the PPV, home shopping, and other  
5 interactive viewing situations.

### **Summary of the Invention**

It is an object of the present invention to provide a communications link back to a central  
site from a television system located in a viewer's home.

10 It is another object of the present invention to provide a television system having an  
integral cordless telephone capability for allowing automatic transmission of information over  
a telephone connection from the television system to a central site.

It is yet another object of the present invention to enable television viewers to easily order  
PPV programs and purchase products during home shopping television programs simply by  
pushing a button on their television remote controllers.

15 It is a further object of the present invention to enable a television system used for viewing  
PPV programs and for home shopping applications to be situated anywhere in a viewer's home  
without regard to proximity of a telephone jack.

20 It is a still further object of the present invention to provide a television system having an  
integral cordless telephone capability for allowing automatic transmission of information over  
a telephone connection and which balances cost and convenience for the viewer.

25 Additional objects, advantages and novel features of the invention will be set forth in part  
in the description which follows, and will become apparent to those skilled in the art upon  
examination of the following or may be learned by practice of the invention. The objects and  
advantages of the invention may be realized and attained by means of the instrumentalities and  
combinations particularly pointed out in the appended claims.

30 According to the present invention, the foregoing and other objects and advantages are  
attained by a system for communicating information from a television viewer to a central site,  
the system including a remote control unit for sending command signals from the viewer to a  
television or video cassette recorder (VCR). Circuitry integral with the television or VCR  
accepts the command signals from the remote control unit and interprets the signals to form a  
viewer command, such as a purchase command, to be communicated to the central site. The  
circuitry automatically sends dual-tone multifrequency (DTMF) tone signals representing the  
command over a radio frequency (RF) link to a cordless telephone base unit which is connected  
to the central site by a public switched telephone network. The cordless telephone base unit  
35 initiates a telephone call to the central site and communicates the DTMF tone signals received  
from the DTMF circuitry to the central site. Because of the advantages of RF communication,  
the television or VCR does not have to be in the same room as, or in close proximity to the  
cordless telephone base unit. The television receives a television signal and extracts information

1  
related to a product being advertised on a television program from the vertical blanking interval  
of the television signal. This information may include the telephone number of the central site  
5 used for making the telephone connection as well as identification information for products. A  
cordless telephone handset in communication with the cordless telephone base unit is also  
included to allow the television viewer or other user to make normal telephone calls with the  
cordless telephone.

10 In an embodiment of the present invention, a method of purchasing a product advertised  
on a program displayed by a television includes reception of a purchase command by a remote  
control unit of the television, transmission of the purchase command over an infrared link to the  
television, and initiation of a telephone connection by a cordless telephone base unit to a central  
site. The purchase command is then sent by dual-tone multifrequency signal generation circuitry  
15 resident in the television over a radio frequency link to the cordless telephone base unit. The  
cordless telephone base unit sends the purchase command to the central site over the telephone  
connection. The central site then processes the purchase command.

20 In another embodiment of the present invention, the circuitry for sending the DTMF tone  
signals is included in the remote control unit instead of the television. In this embodiment, when  
the viewer pushes a button on the remote control unit to communicate information such as a  
purchase command to the central site, the remote control unit directs the DTMF circuitry to send  
the DTMF tone signals representing the viewer's command to the cordless telephone base unit.  
These DTMF tone signals are then forwarded over the telephone connection to the central site.  
In this embodiment, the television still extracts information from the vertical blanking interval  
of the television signal, but the extracted information is transmitted to the remote control unit for  
25 processing.

Still other objects and advantages of the present invention will become readily apparent  
to those skilled in the art from the following detailed description, wherein is shown and described  
only the preferred embodiment of the invention, simply by way of illustration of the best mode  
contemplated for carrying out the invention. As will be realized, the invention is capable of other  
30 and different embodiments, and its several details are capable of modifications in various obvious  
respects, all without departing from the invention. Accordingly, the drawings and description  
are to be regarded as illustrative in nature, and not as restrictive.

#### **Brief Description of the Drawings**

FIG. 1 is a block diagram of the present invention.

FIG. 2 is a schematic diagram of the DTMF Circuit.

FIG. 3 is a functional block diagram of a data transmission system for television signals.

FIG. 4 is a block diagram illustrating the main components of the Television and Remote  
Control Unit.

FIG. 5 is a block diagram of an alternate embodiment of the present invention.

FIG. 6 is a flow chart illustrating the high level operational steps of the present invention.

FIG. 7 is a schematic of a menu display for a list of service providers.

FIG. 8 is a schematic of a menu display for a list of available items from a selected service provider.

FIG. 9 is a schematic of a display to inform the viewer of the status of the telephone order.

#### **Detailed Description of the Preferred Embodiment**

The present invention is a back link system connecting a television, VCR, or other device (hereafter denoted as "television"), heretofore primarily designed to only receive information from a central site, to a cordless telephone base unit by enabling the television to operate certain functions of a cordless telephone handset. The present invention includes the functionality of the cordless telephone handset in the television, thereby enabling the television to directly initiate a telephone call through the cordless telephone base unit and to send selected information from a viewer or user via the telephone connection over the public switched telephone network to a central site.

FIG. 1 is a block diagram of the present invention. Television 10 receives a Television Signal 12 from a signal source. The Television 10 could be a standard television, a VCR, or any other device capable of tuning television signals. The Television Signal may be received from an antenna, a cable, a satellite signal, or any other transmission medium for television signals. The Television 10 includes a Dual-Tone Multifrequency (DTMF) Circuit 14.

The DTMF Circuit 14 is similar to the corresponding portion of a well known cordless telephone handset. However, the DTMF Circuit does not include such typical handset features as a microphone, loudspeaker, ringer speaker, volume control, on/off switch, hold key, mute key, push button keypad, and rechargeable battery, because the DTMF Circuit does not directly interact with a user of the telephone. Hence, the manufacturing cost of the DTMF Circuit can be kept quite low in comparison to the typical cordless telephone handset. Note that the primary purpose of the DTMF Circuit is to transmit DTMF tone signals to a pre-existing Cordless Telephone Base Unit 16. It is not necessary that the DTMF circuit transmit voice signals or receive voice or DTMF tone signals. The pre-existing Cordless Telephone Base Unit 16 may be in communication with a standard Cordless Telephone Handset 17. The Base Unit-Handset combination may be used by the television viewer or other user to make telephone calls in the normal way. The DTMF tone signals are used to dial the telephone and to transmit alphanumeric data needed to complete a viewer transaction such as the purchase of a product or a PPV television program.

Note that the present invention uses a pre-existing cordless telephone having a base unit and a handset to form a two-way transmission link with a television. The Cordless Telephone

Base Unit 16 performs not only its conventional function of a transmission link between the public switched telephone network and the Cordless Telephone Handset 17, but also a transmission link between the public switched telephone network and the Television 10. In other words, the Cordless Telephone Base Unit performs two functions.

The DTMF system uses internationally standardized combinations of frequencies. Alphanumeric characters are encoded in the form of two pairs of tones for transmission via the telephone lines. In conventional DTMF signaling, the numbers and symbols present on a telephone keypad are each transmitted as a dual-frequency tone. For example, the number "1" is represented by a tone comprised of the frequencies 697 Hz and 1209 Hz, and the star symbol "\*" is represented by a tone at the frequencies 852 Hz and 1477 Hz. A total of seven different frequencies are utilized in pairs to transmit the ten numbers and two symbols on a conventional telephone keypad. In some systems, four additional characters are provided. Table I is a matrix showing the high and low frequency pairs, in Hz, required for each of the 16 possible characters. Each character is represented by a dual set of audio frequency signals, which when transmitted together are recognized as the unique representation of the character.

TABLE 1

Lower Frequency (Hz)	Higher Frequency 1209	Higher Frequency 1336	Higher Frequency 1446	Higher Frequency 1633
697	1	2	3	A
770	4	5	6	B
852	7	8	9	C
941	*	0	#	D

To transmit alphabetic characters over the telephone lines as well as the conventional numbers and symbols, the seven standard frequencies 697 Hz, 770 Hz, 852 Hz, 941 Hz, 1209 Hz, 1336 Hz, and 1447 Hz are used, and an eighth frequency, normally unused, is also employed. The eighth frequency has a value of 1633 Hz. The additional frequency is used only for transmission of characters that are not typically transmitted via DTMF signaling. To indicate the transmission of an alphabetic character, the first tone in a pair of tones which identify the letter includes the eighth frequency as a component thereof. Each letter is comprised of a first tone which includes the eighth frequency in combination with one of the seven conventionally employed frequencies, followed by a second tone comprised of any two of the eight available

1  
frequencies. Similarly, other non-conventional characters, such as punctuation and spaces, are transmitted by generating a unique pair of dual-frequency tones.

5 The DTMF Circuit may be enhanced to also provide DTMF reception capabilities, however, voice reception is not needed. With this feature, it can be determined whether a dial tone is available on the telephone line, that the line is not busy, or that confirmation data concerning a transaction is received.

10 FIG. 2 is a schematic diagram of the DTMF Circuit 14. An Isolation Circuit 100 is provided which is connected to Antenna 102 and which is connected through Line 104 to the output of a Transmitter Section 106 and also through Line 108 to the input of an optional Receiver Section 110. A voltage supply input of the Receiver Section 110 is connected through Line 112 to Control and Switching Circuitry 114, which is connected to Microprocessor 116 to control operation of the Receiver Section 110. The output of the Receiver Section 110 is connected to Line 118, which is connected to an input of 1633 Hz Detector 120. The output of 1633 Hz Detector 120 is applied through Line 122 to Control and Switching Circuitry 114. A control input to the 1633 Hz Detector 120 is connected through Line 124 to an output of the Microprocessor 116, which is also connected to Control and Switching Circuitry 114. Microprocessor 116 includes a tone generator which may be a standard type of DTMF integrated circuit. When a 1633 Hz signal is produced at the output of the Receiver Section 110 and detected by 1633 Hz Detector 120, the Microprocessor 116 operates to engage communications with Television 10 over Line 126. DTMF tones received by Receiver Section 110 are applied through Line 112 to Control and Switching Circuitry 114, wherein the DTMF tone signals are converted to digital signals. The digital signals are sent thereafter to Microprocessor 116 for eventual transmission to Television 10 over Line 126.

25 To transmit DTMF tone signals from the DTMF Circuit 14 to the Cordless Telephone Base Unit 16, a Summing Amplifier 128 is provided which has an output connected through Line 130 to Transmitter Section 106 to frequency modulate the output of the Transmitter Section. Control inputs of the Transmitter Section 106 are connected through Line 132 to the Control and Switching Circuitry 114. The Microprocessor receives digital signals for transmission over Line 134 from the Television 10. The Microprocessor operates to apply a 83 Hz square wave signal through Line 136 to 83 Hz Filter 138, which is connected through Line 140 to an input of Summing Amplifier 128. The output of the Transmitter Section is then modulated to send out a substantially sinusoidal 83 Hz burst which signals the Cordless Telephone Base Unit 16.

35 After a 83 Hz burst is sent, the Microprocessor 116 develops a 98 Hz coded signal on Line 142 which is applied as a second input of the Summing Amplifier 128. The coded signal is detected by the Cordless Telephone Base Unit and, if properly received, the Cordless Telephone Base Unit develops a 1633 Hz "handshake" signal which is transmitted back to the DTMF



1  
Circuit to be detected by 1633 Hz Detector 120. Then the Microprocessor 116 operates to  
develop a 98 Hz coded null signal on Line 142 for transmission by the Transmitter Section 106.  
5 If the null signal is properly detected by the Cordless Telephone Base Unit, the transmission of  
the 1633 Hz "handshake" signal is terminated and the Microprocessor responds to the  
termination of the "handshake" signal by developing another coded signal on Line 142 for  
transmission, the sequence being repeated until communications are deemed to be effectively  
established. Power for the DTMF Circuit is supplied by the Television 10 over Line 144. Clock  
10 circuitry of the Microprocessor 116 is connected to a Crystal 146 through a Resistor 148 to power  
Line 144.

The Cordless Telephone Base Unit 16 then operates to connect to an outside telephone  
line and to allow transmission of a dial tone back to the DTMF Circuit 14. The DTMF tone  
signals for the telephone number to be dialed are then transmitted from the Microprocessor 116  
15 to the Cordless Telephone Base Unit 16 and the Cordless Telephone Base Unit establishes the  
telephone connection. DTMF tone signals representing viewer transaction information may now  
be sent from the Television 10 to the Central Site 22 through the Cordless Telephone Base Unit  
16 and Telephone Line 20.

In an alternate embodiment, the DTMF Circuit could be set up to be compatible with a  
20 viewer's existing cordless telephone base unit. Some cordless telephones include digital code  
security to prevent other handsets from communicating with the base unit. The handset and base  
unit of the cordless phone share a digital code. The DTMF Circuit 14 could be set up to receive  
and use this code (using learning remote or stored setup data methods) much like universal  
infrared remote controllers. Alternatively, it is foreseen that cordless telephone manufacturers  
25 may include a code that when received by the Cordless Telephone Base Unit 16, would disable  
this security feature. Accordingly, the DTMF Circuit could be set up to transmit the disable code  
specific to the Cordless Telephone Base Unit, again using learning remote or stored setup data  
methods.

Referring back to FIG. 1, DTMF Circuit 14 and Cordless Telephone Base Unit 16  
30 communicate over a plurality of communication channels via radio frequency (RF) link 18.  
Hence, the DTMF Transmitter and the Cordless Telephone Base Unit each include an antenna  
(not shown in FIG. 1) for transmission and reception of RF signals. Full duplex communication  
between the Cordless Telephone Base Unit 16 and the DTMF Circuit 14 is obtained by frequency  
modulation and demodulation of signals on FCC-designated channels. The RF link may be  
35 implemented as a 900 MHz Digital Spread Spectrum communication path, as is provided, for  
example, by the circuitry contained in the model CLT-926 cordless telephone commercially  
available from Sanyo Consumer Electronics. Spread spectrum is a modulation technique in which  
the information content of a modulated wave form is spread over a wider bandwidth than that of

1  
the original information signal. A spread spectrum system takes an input signal, mixes it with  
FM noise and "spreads" the signal over a broad frequency range, hopping from frequency to  
5 frequency at split-second intervals. The spread signal has a greater bandwidth than the original  
message and is less likely to interfere with other signals.

A general overview of spread spectrum technology is provided by R.C. Dixon, *Spread  
Spectrum Systems*, published by John Wiley & Sons, New York, NY, 1984. One type of spread  
spectrum modulation is frequency hopping. According to Dixon, a frequency hopping system  
10 or "frequency hopper" consists of a code generator and a frequency synthesizer capable of  
responding to the coded output from the code generator. Also, according to Dixon, "frequency  
hopping" modulation is more accurately termed "multiple-frequency, code-selected, frequency  
shift keying." It is simply frequency shift keying (FSK) except that the set of frequency choices  
is greatly expanded. Simple FSK most often uses only two frequencies; for example, F1 is sent  
15 to signify a "mark," F2 to signify a "space." Frequency hoppers, on the other hand, often have  
thousands of frequencies available. The number of frequency choices and the rate of hopping  
from frequency to frequency in any frequency hopper is governed by the requirements placed on  
it for a particular use. Cordless telephone sets designed to operate in a frequency hopping system  
are now widely available from manufacturers such as Lucent Technologies, Motorola, Sharp, and  
20 others.

By using digital spread spectrum communications, RF link 18 exhibits superior noise  
immunity, longer operating range, automatic best channel selection, and superior security against  
eavesdropping. However, RF Link 18 may also be implemented by cordless telephone circuitry  
operating over a selected one of 10 channels allocated in the 46-50 MHz FCC-allocated  
25 frequency band.

Instead of being integral with the Television 10, the DTMF Circuit 14 could also be a  
stand-alone unit, i.e. a "set top box", which is directly connected into a telephone jack of a DSS  
or into a digital cable box.

The Cordless Telephone Base Unit 16 may or may not be located in the same room as the  
30 Television 10 and DTMF Circuit 14. For effective operation, the distance between the Cordless  
Telephone Base Unit and the DTMF Circuit may extend up to several hundred feet, which is  
more than adequate for residential applications. The Cordless Telephone Base Unit 16 is  
arranged to be connected to at least one telephone line and also to a 120-volt alternating current  
(AC) line cord (not shown) for plugging into a standard electrical outlet. Alternatively, the  
35 connection to the public switched telephone network can be via a cellular network. The Cordless  
Telephone Base Unit 16 may include one or more control and signaling buttons (not shown). An  
exemplary embodiment of the Cordless Telephone Base Unit is shown in U.S. Patent No.  
4,706,274, issued to Baker et al., entitled "Cordless Telephone System" and incorporated herein

1  
by reference. The Cordless Telephone Base Unit may include such features as a built-in speaker,  
microphone, line select button, hold button, intercom call switch, answer button, volume control  
5 knob, and various lights to indicate such events as power availability, incoming calls and hold  
status. The Cordless Telephone Base Unit would not necessarily have to include a receptacle for  
a cordless telephone handset because portions of the typical telephone handset are integral with  
the Television 10; thus there may be no need for such a receptacle. For similar reasons, the  
Cordless Telephone Base Unit would not have to include a portable handset battery recharger.  
10 However, pre-existing Cordless Telephone Base Unit 16 could be employed without modification  
with pre-existing Cordless Telephone Handset 17 to make telephone calls in the usual way. In  
other words, Cordless Telephone Base Unit 16 can perform dual functions -- serve as a standard  
telephone for two way voice transmission and serve as a data transmission link from a television  
to a telephone network.

15 The Cordless Telephone Base Unit 16 could also be used as an answering telephone  
completely independent of the DTMF Circuit 14. To receive a call at the Cordless Telephone  
Base Unit, an answer button (not shown) is pressed and the Cordless Telephone Base Unit  
operates as a conventional "speaker phone."

20 The Cordless Telephone Base Unit 16 is coupled via public switched telephone network  
20 with Central Site 22. The Central Site includes components to answer the incoming telephone  
call, receive the transaction data from the Cordless Telephone Base Unit, implement the  
transaction, and send confirmation data back to the Television. The Central Site represents the  
centrally located PPV program provider, cable company, or broadcast television station or  
network. Typically, the Central Site will include a well known general purpose computer system  
25 and associated circuitry for performing the above functions.

The Cordless Telephone Base Unit 16 can also communicate with other telephones such  
as Party 21 through the public switched telephone network 20.

30 In the preferred embodiment of the present invention, PPV or home shopping control  
information is embedded in the television signal at the Central Site 22 or other location and  
extracted from the Television Signal 12 by the Television 10 (the extraction and control  
capability may also be included in a VCR or other appliance). One method of embedding the  
information into the television signal is to embed the information in the vertical blanking  
intervals (VBIs) of the Television Signal. The vertical blanking intervals can contain closed  
caption data for the hearing impaired and extended data services (EDS) data.

35 Video images in a cathode ray tube (CRT) video device, e.g. television, are generated by  
scanning a beam along a predefined pattern of lines across a screen. Each time all of the lines  
are scanned, a frame is said to have been produced. In the National Television Standards  
Committee (NTSC) implementation, such as is used in the United States, a frame is scanned 30

1  
times per second. Each television frame comprises 525 lines which are divided into two separate  
fields, referred to as field 1 ("odd field") and field 2 ("even field"), of 262.5 lines each.  
5 Accordingly, these even and odd fields are transmitted alternately at 60 Hz. The lines of the even  
and odd fields are interleaved to produce the full 525 line frame once every 1/30 of a second in  
a process known as interlacing. Another standard in the world uses 625 lines of information and  
interlace 312 and 313 lines at 50 fields per second. In the 525 line NTSC standard used in the  
United States, approximately 480 lines are displayed on the television screen.

10 The interlacing scanning pattern of a conventional television receiver includes scanning  
the CRT beams from the top left corner horizontally across the screen. After the first, topmost  
line is scanned, the beam returns to the left side during a period of time known as the horizontal  
blanking interval and repeats scanning along another line which is parallel to but lower than the  
previous line. The scanning continues along the lines until the beam reaches the center of the  
15 bottom part of the screen to complete field 1.

From the bottom of the screen, the beam returns to the top where it starts scanning from  
substantially the center of the screen along the lines for field 2 which interlace the lines of field  
1. This is not an instantaneous bottom to top jump but actually requires the length of time to scan  
21 horizontal lines. These lines are lines 1 through 21 of field 2. The second half of line 21,  
20 field 2 is displayed. Then lines 285 to 525 of fields 2 are scanned to complete field 2. When the  
beam reaches the bottom right corner of the screen, the picture frame is formed. The beam then  
retraces to the top.

During the time in which the beam returns from the bottom to the top of the screen  
between the fields, it carries no video or picture signals because it does not produce any picture  
25 element on the screen. This time interval is generally known as the vertical blanking interval  
(VBI). Its duration is typically 21 times the time duration that it takes the beam to scan across  
the screen. Apparatus and methods using the NTSC standard with 21 lines in each VBI are well  
known in the art and therefore are not discussed in further detail herein.

Because no image is produced on the display during the VBI, no picture information needs  
30 to be carried by the television broadcast signals. Thus, the VBI is used for conveying auxiliary  
information from a television network or station to viewers. For example, closed caption data  
associated with the television program are transmitted as encoded composite data signals in VBI  
line 21, field 1 of the standard NTSC video signal. Lines 1 through 9 of the VBI of each field  
are used for vertical synchronization and post equalizing pulses. Hence, lines 10 through 21 are  
35 available for carrying auxiliary information.

FIG. 3 is a functional block diagram of a data transmission system for television signals.  
As used herein, the terms "broadcast" and "transmit" are used interchangeably for the  
transmission of signals over cable or fiber optics, to or from satellites, over the air, and the like.

1  
The data transmission system is the source for the Television Signal 12 received by the  
Television 10 of FIG. 1. A Network Head End 160 transmits a composite television signal  
5 containing inserted information in a portion thereof, typically the vertical blanking interval, to  
a Satellite 162 which rebroadcasts the same to a local Affiliate 164. The Affiliate 164 may  
further insert data into the VBI of the received television signal and transmit the same to a local  
Cable Head End 166. The Cable Head End 166 receives television signals from a plurality of  
sources (including satellites) and may further insert data into the VBI of any of the television  
10 signals. The signals from the plurality of sources are combined into a composite television  
signal, amplified, and provided over a cable to a plurality of individual Receivers 168. In the  
preferred embodiment, Television 10 from FIG. 1 is an example of a Receiver 168, however,  
Receivers can include cable boxes, VCRs, and satellite receivers as well as televisions. In  
addition, the individual Receivers 168 may receive signals directly from local Affiliate 164 by  
15 air, which may include the use of a Satellite 162, or by cable.

More specifically, the Network Head End 160 has a video tape recorder (VTR) 170 for  
providing a program signal to an Inserter 172. A Controller 174, also at the head end controls  
the scheduling of loading tapes from a cart (e.g., a machine with a plurality of video tape  
cassettes which are moved by a robotic arm from a storage location and inserted into a VTR and  
20 vice versa). Furthermore, the Controller 174 controls the lighting of stages during live television  
broadcasts, such as news broadcasts. The Controller 174 is typically a microprocessor-based  
system. A Traffic Computer 176 controls the exact timing of playing individual segments of  
video tapes and inserting commercials therebetween as well as switching between different  
programs. Some Network Head Ends 160 have both a Traffic Computer 176 and a Controller  
25 174.

The Controller 174 provides data and commands to the Inserter 172. The Traffic  
Computer 176 provides data and commands to the Controller, if present. Otherwise, the Traffic  
Computer provides these signals directly to the Inserter 172. The Inserter 172 inserts data into  
the VBI of the composite television signal and provides the television signal to a Transmitter  
30 178, which in turn provides the television signal on a microwave carrier to Satellite Dish 180 for  
transmission to Satellite 162.

The Satellite 162 retransmits the received signal, which is received by a Satellite Dish 182  
at the Affiliate 164. The Satellite Dish 182 provides the signal to a Station Inserter 184 at the  
local Affiliate 164. The Affiliate may also insert data into the composite television signal. The  
35 television signal is then provided to a Transmitter 186 and then to a Transmitting Antenna 188.

A local Cable Head End 166 has a plurality of Satellite Dishes 190 and Antennas 192 for  
receiving signals from a plurality of Network Head Ends 160 and Affiliates 164. The received  
signal from each of the Satellite Dishes and Antennas is provided to respective inputs of

1  
Multi-channel Inserter 194, which can also insert data into the VBI of a received signal. The multi-channel output from the Inserter 194 is amplified in Amplifier 196 and provided over a  
5 Cable 197 to individual Receivers 168. Alternatively, the Receivers 168 could receive the broadcast information via antennas or satellite receivers.

Note that the Central Site 22 of FIG. 1 may be located at the Network Head End 160, Affiliate 164, or Cable Head End 166 and be integral with the components depicted in FIG. 3 as Network Head End, Affiliate, and Cable Head End, respectively. Alternatively, the Central Site  
10 22 is located at a location different than the Network Head End, Affiliate, or Cable Head End. In either case, the operator of the Central Site 22 provides information regarding PPV events and home shopping products to be inserted into the VBI of the television signal during broadcast of related advertising segments.

Caption data decoding used in the data transmission system is further described in the  
15 following specifications, which are hereby incorporated by reference herein: Title 47, Code of Federal Regulations (CFR), Part 15, as amended by GEN. Docket No. 91-1; FCC 91-119; "CLOSED CAPTION DECODER REQUIREMENTS FOR THE TELEVISION RECEIVERS"; Title 47, CFR Part 73.682(a)(22), Caption Transmission format; Title 47, CFR Part 73.699, figure 6; "TELEVISION SYNCHRONIZING WAVE FORM"; Title 47 CFR Part 73.699, figure  
20 17a; "LINE 21, FIELD 1 DATA SIGNAL FORMAT"; and PBS Engineering Report No. E-7709-C, "TELEVISION CAPTIONING FOR THE DEAF: SIGNAL AND DISPLAY SPECIFICATIONS."

The extended data services is further described in the Recommended Practice for Line 21 Data Service, Electronics Industries Association, EIA-608 (drafts October 12, 1992 and June 17,  
25 1993), the subject matter of which is hereby incorporated by reference. Under this standard, additional data is provided in line 21, field 2 of the vertical blanking interval. This additional data includes two closed captioning fields, two text mode fields and the extended data services. The extended data includes, among other information, program name, program length, length into show, channel number, network affiliation, station call letters, universal coordinated time (UCT),  
30 time zone, and daylight savings time usage. Upstream at the Network Head End 160, the network inserts the program name, the length of the show, the length into the show, the network affiliation, and the UCT. Downstream at the Affiliate 164, the Affiliate inserts the channel number, the time zone, the daylight savings time usage and program names. The Network Head End inserts the data that does not differ for the different Affiliates. PPV event and home  
35 shopping product data may be inserted by either the Network Head End 160, the Affiliate 164, or the local Cable Head End 166.

The data may be manually entered from a local Terminal 198. The Terminal 198 may be used to build, recall, or edit information to be used as insertion data. The Terminal 198 typically

1 includes a computer. In addition, Modem 199 may be used to provide data to Inserter 172. The  
data may be provided manually or automatically from remote sites, such as the Central Site 22.  
5 The output of the Inserter 172 is a composite television signal including the PPV event and home  
shopping data.

Referring back to FIG. 1, the viewer uses Remote Control Unit 24 to send commands to  
the Television 10 over an infrared link 26. Remote Control Unit 24 includes BUY button 28  
which is pushed by the viewer to initiate a purchase transaction. Television 10 receives the BUY  
10 command and communicates the request to the DTMF Circuit 14.

FIG. 4 is a block diagram illustrating the main components of the Television 10 and  
Remote Control Unit 24. Television 10 is capable of decoding the vertical blanking interval lines  
and using the embedded information to support PPV and home shopping applications. The  
Television has a Tuner 200 which receives the Television Signal 12 from either an antenna, a  
15 cable box, a satellite receiver, or other signal transmission medium. A VBI Decoder 202 is  
coupled to the output of the Tuner 200. A Microprocessor 204, which implements the Television  
control logic, receives the output of the VBI Decoder 202. The Microprocessor controls the  
output of the Television Signal 12 to Monitor 206 for viewing by a viewer. The Microprocessor  
204 also communicates with the DTMF Circuit via output Line 134 and input Line 126. The  
20 Microprocessor executes programming instructions to support PPV, home shopping, and other  
applications. Infrared Receiver "R" 208 receives commands and data from Remote Control Unit  
24, which are then forwarded to Microprocessor 204 for processing.

Remote Control Unit 24 includes an Infrared Transmitter "T" 210 to send commands and  
data to Infrared Receiver 208. Microprocessor 212 controls the operation of the Remote Control  
25 Unit by accepting input data from Keypad 214, displaying output data on Liquid Crystal Display  
(LCD) 216, and sending commands and data to the Infrared Transmitter 210 for transmission to  
the Television 10. Included in the Keypad 214 are keys for selecting specific functions relating  
to PPV or home shopping applications, such as a "BUY" key, or keys indicating PPV programs  
or television channels.

30 In the preferred embodiment of the present invention, program-related information that  
is embedded in the vertical blanking interval lines of the Television Signal 12 includes a  
telephone number related to the information that is being broadcast. The telephone number in  
the program-related information is extracted from the Television Signal by the VBI Decoder 202  
and sent to the DTMF Circuit 14 by the Microprocessor 204 for initiating a telephone connection.

35 Note that the difference between the present invention and the concept wherein a remote  
control unit is also a telephone is the synchronization and organization of data in the Television  
10, which itself may be simultaneously receiving data from the Television Signal 12. This  
synchronization of data allows the viewer to respond to certain stored or time-sensitive

1  
information displayed on the Television (supplied to the Television in either digital or analog  
form) by pressing keys on the Remote Control Unit 24. The Television 10 then combines the  
5 received command information with PPV program or product identification data and telephone  
numbers for transmission to the Cordless Telephone Base Unit 16 for forwarding to the Central  
Site 22 for processing.

FIG. 5 is a block diagram of an alternate embodiment of the present invention. In this  
embodiment, the DTMF Circuit 14 resides in the Remote Control Unit 24 instead of the  
10 Television 10. Two-way communication is now needed between the Television 10 and the  
Remote Control Unit 24 so that decoded VBI data (such as telephone number and product  
information) can be forwarded to the Remote Control Unit 24 for processing by the  
Microprocessor in the Remote Control Unit. In this instance, it is important to identify what PPV  
program the viewer is purchasing. Separate keys (not shown) can be included in the Remote  
15 Control Unit 24 which are labeled with names of PPV programs or services (such as HBO,  
SHOWTIME, ESPN, etc.). In order to select a PPV program, the viewer presses the key  
representing a particular service, followed by the BUY key 28. As in FIG. 1, the DTMF Circuit  
14 may also include the capability for receiving data. However, since no voice transmission or  
reception is needed, the circuitry required to implement DTMF transmission and receptions is  
20 smaller and simpler than in conventional cordless telephone handsets.

FIG. 6 is a flow chart illustrating the high level operational steps of the present invention.  
After Start Step 300, the Television 10 receives data regarding an advertising segment in the  
vertical blanking interval lines of the Television Signal 12 at Step 302. For example, the  
advertising segment could contain a preview of an upcoming PPV event or product for sale in  
25 a home shopping situation. The embedded data includes a program or product identifier, and the  
telephone number of the PPV service provider or seller. The advertising segment contains the  
price of the PPV event or product so the viewer can make an informed decision on whether to  
purchase the product or the right to view the advertised PPV event. The viewer sees the  
advertising segment displayed on the Television at Step 304, and is prompted, either audibly or  
visually, to respond. If the viewer decides to buy, at Step 306 the viewer pushes the BUY button  
30 28 on the viewer's Remote Control Unit 24. Next, at Step 308, the Remote Control Unit 24  
sends a signal via Infrared Transmitter 210 to the Infrared Receiver 208 located in the Television  
10. The signal includes the unique code for the BUY button, thereby instructing the  
Microprocessor 204 in the Television that the viewer wants to buy the currently advertised PPV  
event or product.  
35

At Step 310, the Microprocessor 204 combines the received BUY command with  
identification information of the viewer (which is stored in memory resident in the  
Microprocessor 204 during initialization of the Television 10) and the embedded advertising data



1  
discussed above. The viewer identification information may include the viewer's credit card  
information for payment and billing purposes. At Step 312, the Cordless Telephone Base Unit  
5 16 initiates the telephone call, connecting to the Central Site identified by the telephone number  
passed to Cordless Telephone Base Unit by the DTMF Circuit 14. The Microprocessor 204 of  
the Television 10 then sends the BUY command to the Cordless Telephone Base Unit 16 via  
DTMF Circuit 14 at Step 313. After the connection is established, the BUY command  
information is transferred to the Central Site at Step 314. At Step 316, the Central Site processes  
10 the BUY command and sends a confirmation message back to the Cordless Telephone Base Unit  
16. Processing of the BUY command could include enabling the viewer to receive access to the  
scheduled PPV event or accepting an order for an advertised product. The Cordless Telephone  
Base Unit at Step 318 relays the confirmation message to the Television via the DTMF Circuit  
14 and the Microprocessor 204. Next, at Step 320, the Microprocessor 204 of the Television 10  
15 stores part or all of the confirmation message and displays part or all of the confirmation message  
on the Monitor 206. The viewer thus gets immediate feedback that the viewer's order for the  
event or product has been accepted. The confirmation message could also include information  
related to the PPV event or product such as the planned delivery date of the product. The  
Television then concludes the telephone call at Step 322 and processing ends at End Step 324.

20 In another preferred embodiment of the invention, the viewer may order a program or  
product which is not currently being advertised by accessing a series of menus. The  
Microprocessor 204 includes a Memory 205 (FIG. 4) for storing a telephone directory which  
includes a list of names for service providers, e.g., PPV program providers and home shopping  
channels, and a telephone number corresponding to each service provider. The Microprocessor  
25 204 may also store in the Memory 205 additional viewer identification information such as the  
viewer's account number for a particular service provider.

Information regarding the service providers, including their names and associated  
telephone numbers, are transmitted by the Central Site 22 in the VBI and received by the  
Microprocessor 204. The Microprocessor creates a list of available service providers as they are  
30 received and assigns each service provider a Provider Reference Number 400 which is stored in  
the Memory 205. The service provider information may be transmitted by the cable company  
or by the individual service providers. The telephone directory may expand over time as  
information for new service providers are received by the Microprocessor.

35 The Microprocessor 204 displays the list of service provider names with the associated  
Provider Reference Number in a Main Menu 402, as shown in FIG. 7, in response to the viewer  
pushing a MENU button provided on Keypad 214.

The Central Site 22 also transmits in the VBI a list of available items currently being  
offered by each service provider. Each item is identified by an associated Item Reference

1  
5  
Number 404. Once in the Main Menu 402 and in response to the viewer pushing a number identifying one of the listed service providers, the Microprocessor displays on the Television 10 a Catalog Display 406 which includes a list of items available from that particular service provider and the corresponding Item Reference Number for each item, as shown in FIG. 8.

10  
The viewer selects an item by pressing a button on the Keypad 214 corresponding to the Item Reference Number 404 for that item. Consequently, the Microprocessor 204 performs the steps 310 to End Step 324, illustrated in FIG. 6, but processes the Item Reference Number and stored service provider information rather than the BUY command and embedded advertising information to form a purchase command.

15  
For example, if the viewer pushes the "1" button on the Keypad 214 while the Main Menu of FIG. 7 is displayed, the Microprocessor 204 will display the catalog of FIG. 8 on the Television 10. If the viewer then presses the "2" button, the Microprocessor will initiate the steps for ordering the PPV program "Blade Runner."

20  
In an alternate preferred embodiment, the Microprocessor controls the DTMF Circuit to initiate a telephone call to a service provider immediately after it is selected from the Main Menu, but before an item is selected. In this manner, the time required to connect to the Central Site 22 after the order is placed is reduced.

25  
In a further alternate preferred embodiment, the step of displaying and selecting a service provider from the Main Menu 402 can be eliminated from the purchasing sequence. According to this embodiment, the Microprocessor 204 displays the Catalog Display 406 for a particular service provider in response to the viewer pushing a LIST button on the Keypad 214 while the Television 10 is tuned to that service provider's broadcast, e.g., a home shopping channel program or an advertisement for a PPV program provider. In response to the viewer selecting an item, the Microprocessor combines the Item Reference Number with the service provider information embedded in the VBI and the stored viewer identification information to form a purchase command.

30  
Many telephone lines include a call waiting feature which may interfere with the connection between the Central Site 22 and the Cordless Telephone Base Unit if a telephone call is incoming during the connection. According to further embodiment of the invention, the DTMF Circuit may be provided with the capability to identify an incoming call, and in cooperation with the Microprocessor automatically disconnect from the Central Site 22 and reconnect when the line is not busy, thereby allowing the incoming call to be received by the  
35  
Cordless Telephone Base Unit. Alternatively, the Microprocessor 204 may deactivate the call waiting feature by instructing the DTMF Circuit to transmit the appropriate call waiting disable code, such as "\*70," when transmitting the tone signals to the Cordless Telephone Base Unit at the initiation of each telephone call to the Central Site 22. Preferably, the Microprocessor 204

1  
displays prompts for the viewer during the initial setup of the Television 10 to enable a selected one of these alternatives.

5 In yet another embodiment, the Microprocessor 204 displays a Status Display 408 on the Television 10 while the Cordless Telephone Base Unit is connected to the Central Site 22 to inform the viewer of the status of the telephone connection and purchase order, as shown in FIG. 9. Preferably, the Status Display includes a Message 410 identifying the status of the connection, such as "Dialing", "Connecting", "Order Confirmed", or "Incoming Call", as well as a Graphical  
10 Representation 412 of the status of the telephone order.

The invention has been described in its presently contemplated best mode, and it is clear that it is susceptible to various modifications, modes of operation and embodiments, all within the ability and skill of those skilled in the art and without the exercise of further inventive activity. Accordingly, what is intended to be protected by Letters Patent is set forth in the  
15 appended claims.

20

25

30

35

**WHAT IS CLAIMED IS:**

1. A system for communicating information from a television viewer to a central site, the system accepting command signals from a remote control unit, comprising:  
a cordless telephone base unit coupled to the central site by a public switched telephone network; and  
means for receiving a television signal, said receiving means comprising means for receiving command signals from the remote control unit and means for automatically communicating dual-tone multifrequency signals representing the command signals to the cordless telephone base unit over a radio frequency link for communication to the central site.
2. The system of claim 1, wherein the receiving means is a television.
3. The system of claim 1, wherein the receiving means is a video cassette recorder.
4. The system of claim 1, wherein the receiving means further comprises means for decoding data carried in the vertical blanking interval of the television signal.
5. The system of claim 4, wherein the television signal includes an advertising segment for a pay-per-view television program, and a pay-per-view television program identifier and a telephone number of the central site are embedded in the vertical blanking interval of the television signal during broadcast of the advertising segment.
6. The system of claim 4, wherein the television signal includes an advertising segment for a product for sale, and a product identifier and a telephone number of the central site are embedded in the vertical blanking interval of the television signal during broadcast of the advertising segment.
7. The system of claim 5 or 6, wherein the command signals sent by the remote control unit comprise a buy command signal for requesting the sending by the receiving means of a purchasing command to the central site.
8. A system for communicating purchase commands from a television viewer to a central site comprising:  
a cordless telephone base unit coupled to the central site by a public switched telephone network;

1  
means for receiving a television signal, said receiving means comprising means for  
extracting information from the television signal and means for sending the extracted  
5 information;

a remote control unit comprising means for receiving the extracted information and  
means for automatically communicating dual-tone multifrequency signals representing the  
viewer's purchase commands to the cordless telephone base unit over a radio frequency link for  
communication to the central site identified by the extracted information.

10  
9. A system for communicating purchase commands from a television viewer to a  
central site, comprising:

a cordless telephone base unit coupled to the central site by a public switched  
telephone network;

15 a remote control unit for sending command signals, the remote control unit  
including an infrared transmitter for sending the command signals;

means for receiving a television signal carrying television programs for display to  
the television viewer, the receiving means comprising:

20 a vertical blanking interval decoder to extract program-related information from  
the television signal;

an infrared receiver to receive command signals from the remote control unit;

25 means coupled to the infrared receiver and the vertical blanking interval decoder  
for building a purchase command from the command signals received from the infrared receiver  
and from the extracted program-related information received from the vertical blanking interval  
decoder; and

means coupled to the receiving means for communicating the purchase command  
to the cordless telephone base unit over a radio frequency link for transmission to the central site  
identified by the extracted program-related information.

30 10. The system of claim 9, wherein the extracted program-related information includes  
a telephone number of the central site and the communicating means comprises means for using  
the telephone number to initiate a telephone call to the central site via the cordless telephone base  
unit.

35 11. The system of claim 10, wherein the television signal includes an advertising  
segment for a pay-per-view television program and the extracted program-related information  
includes a pay-per-view program identifier.

1

5

12. The system of claim 10, wherein the television signal includes an advertising segment for a product for sale and the extracted program-related information includes a product identifier.

13. The system of claim 10, wherein the purchase command comprises a plurality of dual-tone multifrequency signals.

10

14. A system for communicating purchase commands from a television viewer to a central site, comprising:

a cordless telephone base unit coupled to the central site by a public switched telephone network;

15

means for receiving a television signal carrying television programs for display to the viewer, the receiving means comprising:

a vertical blanking interval decoder to extract program-related information from the television signal; and

a first infrared transmitter/receiver to transmit extracted program-related information; and

20

a remote control unit for controlling the receiving means comprising a second infrared transmitter/receiver for receiving extracted program-related information and means for communicating a purchase command to the cordless telephone base unit over a radio frequency link for transmission to the central site identified by the extracted program-related information.

25

15. The system of claim 14, wherein the purchase command includes a product identifier obtained from the extracted program-related information. An interactive television system for communicating purchase commands for purchasing a product from a television viewer to a central site, comprising:

30

a cordless telephone base unit coupled to the central site by a public switched telephone network;

a remote control unit for sending command signals, the remote control unit including an infrared transmitter for sending the command signals and at least one button representing a selected viewer command;

35

a television to receive a television signal carrying television programs for display to the television viewer, the television comprising:

a tuner to tune a selected channel of the television signal;

a vertical blanking interval decoder coupled to the tuner to extract program-related information from the television signal;

1 a monitor to display a television program carried by the television signal on the selected channel;

5 an infrared receiver to receive command signals containing viewer commands from the remote control unit;

a microprocessor coupled to the infrared receiver, the vertical blanking interval decoder, and the monitor to receive command signals from the remote control unit, to control the display of television programs carried by the television signal on the monitor, to receive extracted program-related information from the vertical blanking interval decoder, and to build a purchase command from the command signals and extracted program-related information; and

10 dual-tone multifrequency circuitry coupled to the microprocessor to communicate the purchase command to the cordless telephone base unit over a radio frequency link for transmission to the central site identified by the extracted program-related information.

15 16. The interactive television system of claim 16, wherein the extracted program-related information includes a telephone number of the central site and the dual-tone multifrequency circuitry comprises means for using the telephone number to initiate a telephone call to the central site via the cordless telephone base unit.

20 17. The system of claim 16, wherein the television signal includes an advertising segment for a pay-per-view television program and the extracted program-related information includes a pay-per-view program identifier.

25 18. The system of claim 16, wherein the television signal includes an advertising segment for a product for sale and the extracted program-related information includes a product identifier.

30 19. An interactive television system for communicating purchase commands for purchasing a product from a television viewer to a central site, comprising:

a cordless telephone base unit coupled to the central site by a public switched telephone network;

a television to receive a television signal carrying television programs for display to the television viewer, the television comprising:

35 a tuner to tune a selected channel of the television signal;

a vertical blanking interval decoder coupled to the tuner to extract program-related information from the television signal;

1 -

a monitor to display a television program carried by the television signal on the selected channel;

5 an infrared transmitter/receiver to transmit extracted program-related information; and

a microprocessor coupled to the infrared transmitter/receiver, the vertical blanking interval decoder, and the monitor to control the display of television programs carried by the television signal on the monitor, to receive extracted program-related information from the vertical blanking interval decoder, and to direct the infrared transmitter/receiver to transmit the extracted program-related information; and

10 a remote control unit comprising:  
an infrared transmitter/receiver for receiving extracted program-related information;  
at least one button representing a selected viewer command; and  
15 dual-tone multifrequency circuitry to communicate the selected viewer command and the extracted program-related information as a purchase command to the cordless telephone base unit over a radio frequency link for transmission to the central site identified by the extracted program-related information.

20 20. In a system having a television in communication with a remote control unit and a cordless telephone base unit coupled to a central site by a public switched telephone network, a method of purchasing a product advertised on a program displayed by the television comprising the steps of:

25 receiving a purchase command by the remote control unit;  
sending the purchase command over an infrared link to the television;  
initiating a telephone connection by the cordless telephone base unit to the central site;

sending the purchase command from the television over a radio frequency link to the cordless telephone base unit; and

30 sending the purchase command by the cordless telephone base unit to the central site over the telephone connection.

21. In a system having a television in communication with a remote control unit and a cordless telephone base unit coupled to a central site by a public switched telephone network, a method of purchasing a product advertised on a program displayed by the television comprising the steps of:

35 receiving a purchase command by the remote control unit;



1 ..  
initiating a telephone connection by the cordless telephone base unit to the central site;

5 sending the purchase command from the remote control unit over a radio frequency link to the cordless telephone base unit; and

sending the purchase command by the cordless telephone base unit to the central site over the telephone connection.

10 23. In an interactive television system having a television in communication with a remote control unit and a cordless telephone base unit coupled to a central site by a public switched telephone network, a method of purchasing a product advertised on a television program displayed by the television comprising the steps of:

15 receiving identification information about the advertised product in a television signal;

prompting a television viewer to purchase the advertised product;

receiving a purchase command signal by the remote control unit;

sending the purchase command signal over an infrared link to the television;

20 combining the purchase command signal with the identification information to form a purchase command for the advertised product;

initiating a telephone connection by the cordless telephone base unit to the central site;

sending the purchase command from the television over a radio frequency link to the cordless telephone base unit; and

25 sending the purchase command by the cordless telephone base unit to the central site over the telephone connection.

30 24. The method of claims 21, 22 or 23, wherein the purchase command comprises a plurality of dual-tone multifrequency signals.

25. The method of claim 23, further comprising the step of extracting the identification information from the vertical blanking interval of the television signal.

35 26. The method of claim 25, wherein the step of extracting includes the step of extracting an identifier for the advertised product and a telephone number of the central site from the vertical blanking interval of the television signal.

1 ..  
27. The method of claim 26, wherein the advertised product is a pay-per-view television program.

5  
28. The method of claim 23, further comprising the steps of:  
processing the purchase command by the central site;  
sending a confirmation message by the central site to the cordless telephone base unit over the telephone connection; and  
10 sending the confirmation message by the cordless telephone base unit to the television over the radio frequency link.

15  
29. The method of claim 28, further comprising the step of displaying the confirmation message on the television.

30. The method of claim 29, further comprising the step of terminating the telephone connection to the central site.

20  
31. A system for communicating information from a television viewer to a central site and for telephonic communication between the television viewer and a party, the system accepting command signals from a remote control unit, comprising:

a cordless telephone base unit coupled to the central site and the party by a public switched telephone network;

25 a cordless telephone handset coupled to the cordless telephone base unit for operation by the television viewer to make a telephone call to the party; and

means for receiving a television signal, said receiving means comprising means for receiving command signals from the remote control unit and means for automatically communicating dual-tone multifrequency signals representing the command signals to the cordless telephone base unit over a radio frequency link for communication to the central site.

30  
32. The system of Claim 31 wherein the receiving means is a television or a video cassette recorder and further comprises means for decoding data carried in the vertical blanking interval of the television signal.

35  
33. A system for communicating purchase commands from a television viewer to a central site and for telephonic communication between the television viewer and a party, comprising:

1

a cordless telephone base unit coupled to the central site by a public switched telephone network;

5

a cordless telephone handset coupled to the cordless telephone base unit for operation by the television viewer to make a telephone call to the party;

a remote control unit for sending command signals, the remote control unit including an infrared transmitter for sending the command signals;

10

means for receiving a television signal carrying television programs for display to the television viewer, the receiving means comprising

a vertical blanking interval decoder to extract program-related information from the television signal;

an infrared receiver to receive command signals from the remote control unit;

15

means coupled to the infrared receiver and the vertical blanking interval decoder for building a purchase command from the command signals received from the infrared receiver and from the extracted program-related information received from the vertical blanking interval decoder, the purchase command comprising a plurality of dual-tone multifrequency signals; and

20

means coupled to the receiving means for communicating the purchase command to the cordless telephone base unit over a radio frequency link for transmission to the central site identified by the extracted program-related information, wherein the extracted program-related information includes the telephone number of the central site and the communicating means comprises means for using the telephone number to initiate a telephone call to the central site via the cordless telephone base unit.

25

34. The system of claim 33, wherein the television signal includes an advertising segment for a pay-per-view television program and the extracted program-related information includes a pay-per-view program identifier.

30

35. The system of claim 33, wherein the television signal includes an advertising segment for a product for sale and the extracted program-related information includes a product identifier.

35

36. An interactive television system for communicating purchase commands from a television viewer to a central site for purchasing a product from a selected service provider, comprising:

a cordless telephone base unit coupled to the central site by a public switched telephone network;

1  
a remote control unit for sending command signals, the remote control unit including an infrared transmitter for sending the command signals and at least one button representing a selected viewer command;

5 a television to receive a television signal carrying television programs for display to the television viewer, the television comprising:

a tuner to tune a selected channel of the television signal;

10 a vertical blanking interval decoder coupled to the tuner to extract service provider-related information and at least one product list from the television signal;

a monitor;

an infrared receiver to receive command signals containing viewer commands from the remote control unit;

15 a microprocessor coupled to the infrared receiver, the vertical blanking interval decoder, and the monitor to receive command signals from the remote control unit, to display a viewer selected one of the product lists in response to the command signals from the remote control unit and to build a purchase command from the command signals and service provider-related information; and

20 dual-tone multifrequency circuitry coupled to the microprocessor to communicate the purchase command to the cordless telephone base unit over a radio frequency link for transmission to the central site identified by the extracted service provider-related information.

37. The system of claim 36 wherein the microprocessor comprises:

25 a memory for storing viewer identification information and service provider-related information for at least one service provider;

means for generating a list including at least one of the service providers from the service provider-related information in the memory;

means for displaying the service provider list;

30 means for displaying a selected product list in response to a viewer selection of a service provider from the service provider list; and

means for building the purchase command from the command signals, the stored viewer identification information, and service provider information.

38. The system of claim 36 wherein said products are pay-per-view television programs.

39. In an interactive television system having a television in communication with a remote control unit and a cordless telephone base unit coupled to a central site by a public

1

switched telephone network, a method of purchasing a product from a selected service provider comprising the steps of:

5

storing viewer identification information;  
storing selected service provider identification information;  
displaying a list including at least one product available from the selected service provider;

10

selecting one of said products;  
receiving a signal identifying the selected product by the remote control unit;  
sending the selected product identification signal over an infrared link to the television;

15

combining the selected product identification signal with the viewer identification information and selected service provider identification information into a purchase command for the selected product;

initiating a telephone connection by the cordless telephone base unit to the central site;

sending the purchase command from the television over a radio frequency link to the cordless telephone base unit; and

20

sending the purchase command by the cordless telephone base unit to the central site over the telephone connection.

40. The method of claim 39 further comprising, before the step of displaying the product list, the steps of:

25

displaying a service provider list including at least one service provider; and  
selecting one of the service providers.

41. The method of claim 39, wherein the purchase command comprises a plurality of dual-tone multifrequency signals.

30

42. The method of claim 39, wherein said products are pay-per-view television programs.

43. The method of claim 39, further comprising the steps of:  
processing the purchase command by the central site;  
sending a confirmation message by the central site to the cordless telephone base unit over the telephone connection;

35

1

sending the confirmation message by the cordless telephone base unit to the television over the radio frequency link;

5

displaying the confirmation message on the television; and  
terminating the telephone connection to the central site.

10

44. The method of claim 43 further comprising the step of displaying a status message during the telephone connection.

15

45. The method of claim 39 wherein the step of initiating a telephone connection further comprises the step of sending to the cordless telephone base unit a disable code signal for a call waiting feature on a telephone line to which the cordless telephone base unit is connected.

20

25

30

35

**AMENDED CLAIMS**

[received by the International Bureau on 01 July 1997 (01.07.97);  
original claims 9-20 and 23-45 cancelled; remaining claims unchanged (2 pages)]

1. A system for communicating information from a television viewer to a central site, the system accepting command signals from a remote control unit, comprising:  
a cordless telephone base unit coupled to the central site by a public switched telephone network; and

means for receiving a television signal, said receiving means comprising means for receiving command signals from the remote control unit and means for automatically communicating dual-tone multifrequency signals representing the command signals to the cordless telephone base unit over a radio frequency link for communication to the central site.

2. The system of claim 1, wherein the receiving means is a television.

3. The system of claim 1, wherein the receiving means is a video cassette recorder.

4. The system of claim 1, wherein the receiving means further comprises means for decoding data carried in the vertical blanking interval of the television signal.

5. The system of claim 4, wherein the television signal includes an advertising segment for a pay-per-view television program, and a pay-per-view television program identifier and a telephone number of the central site are embedded in the vertical blanking interval of the television signal during broadcast of the advertising segment.

6. The system of claim 4, wherein the television signal includes an advertising segment for a product for sale, and a product identifier and a telephone number of the central site are embedded in the vertical blanking interval of the television signal during broadcast of the advertising segment.

7. The system of claim 5 or 6, wherein the command signals sent by the remote control unit comprise a buy command signal for requesting the sending by the receiving means of a purchasing command to the central site.

8. A system for communicating purchase commands from a television viewer to a central site comprising:

a cordless telephone base unit coupled to the central site by a public switched telephone network;

means for receiving a television signal, said receiving means comprising means for extracting information from the television signal and means for sending the extracted information;

a remote control unit comprising means for receiving the extracted information and means for automatically communicating dual-tone multifrequency signals representing the viewer's purchase commands to the cordless telephone base unit over a radio frequency link for communication to the central site identified by the extracted information.

21. In a system having a television in communication with a remote control unit and a cordless telephone base unit coupled to a central site by a public switched telephone network, a method of purchasing a product advertised on a program displayed by the television comprising the steps of:

- receiving a purchase command by the remote control unit;
- sending the purchase command over an infrared link to the television;
- initiating a telephone connection by the cordless telephone base unit to the central site;
- sending the purchase command from the television over a radio frequency link to the cordless telephone base unit; and
- sending the purchase command by the cordless telephone base unit to the central site over the telephone connection.

22. In a system having a television in communication with a remote control unit and a cordless telephone base unit coupled to a central site by a public switched telephone network, a method of purchasing a product advertised on a program displayed by the television comprising the steps of:

- receiving a purchase command by the remote control unit;
- initiating a telephone connection by the cordless telephone base unit to the central site;
- sending the purchase command from the remote control unit over a radio frequency link to the cordless telephone base unit; and
- sending the purchase command by the cordless telephone base unit to the central site over the telephone connection.



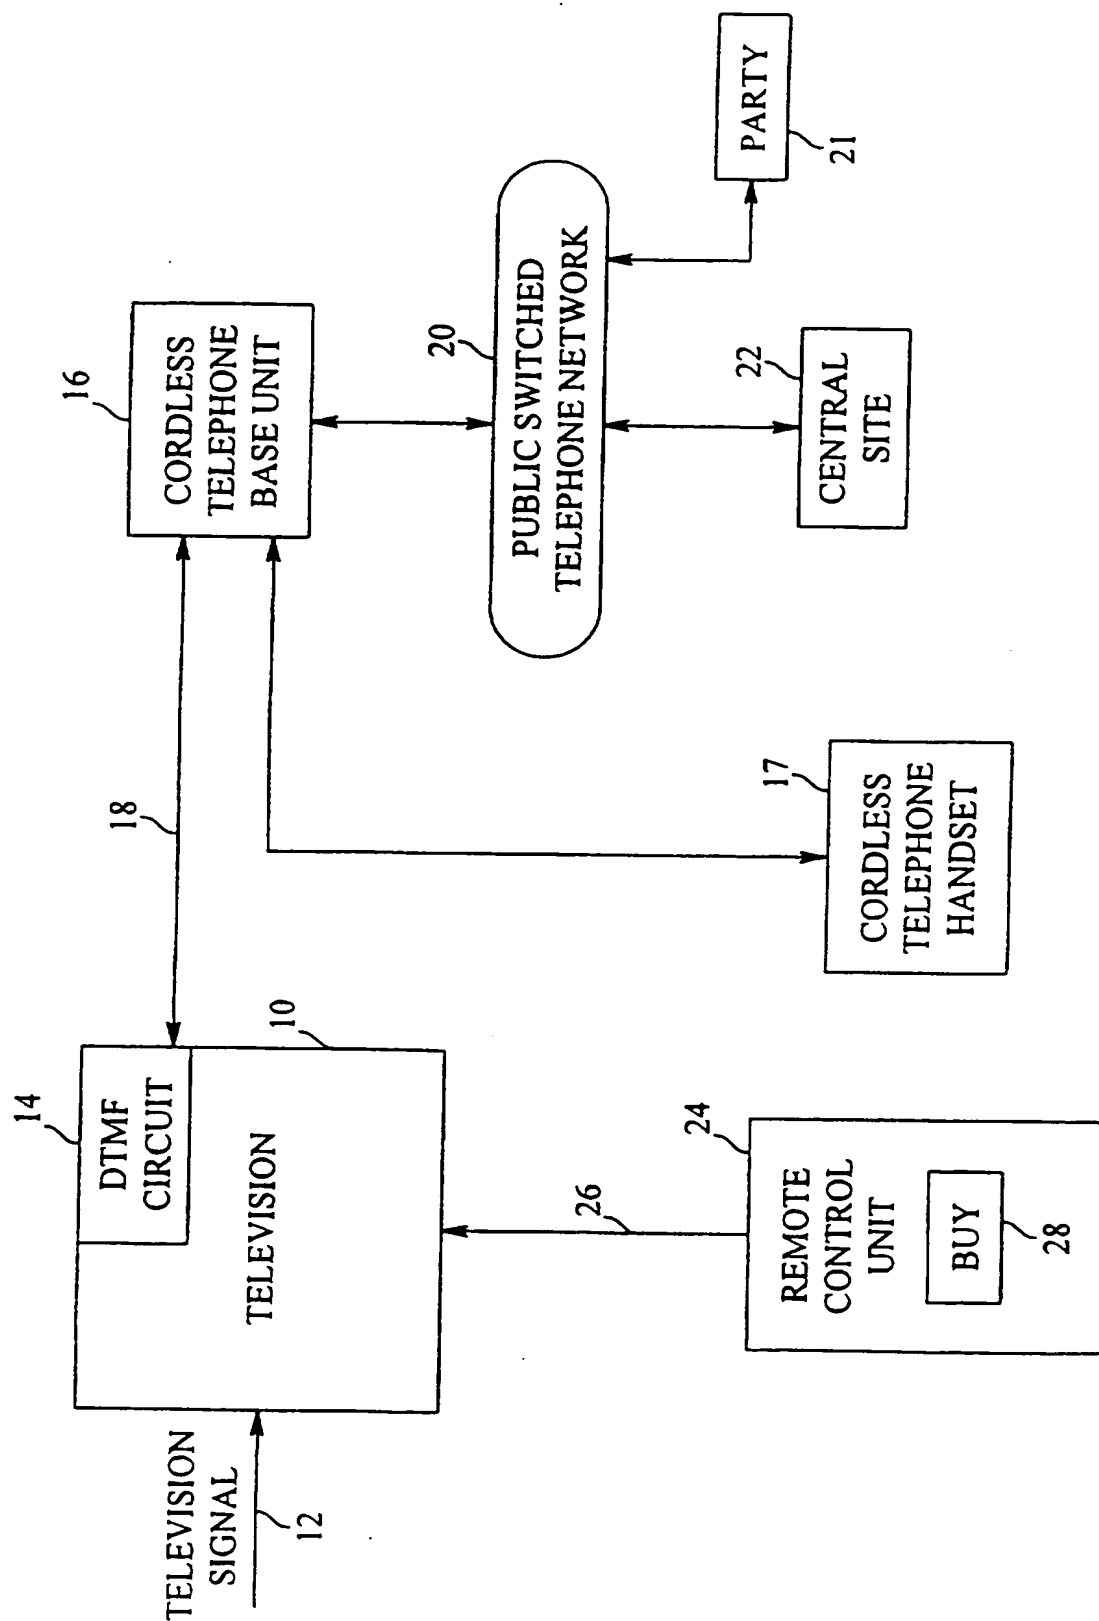


FIG. 1

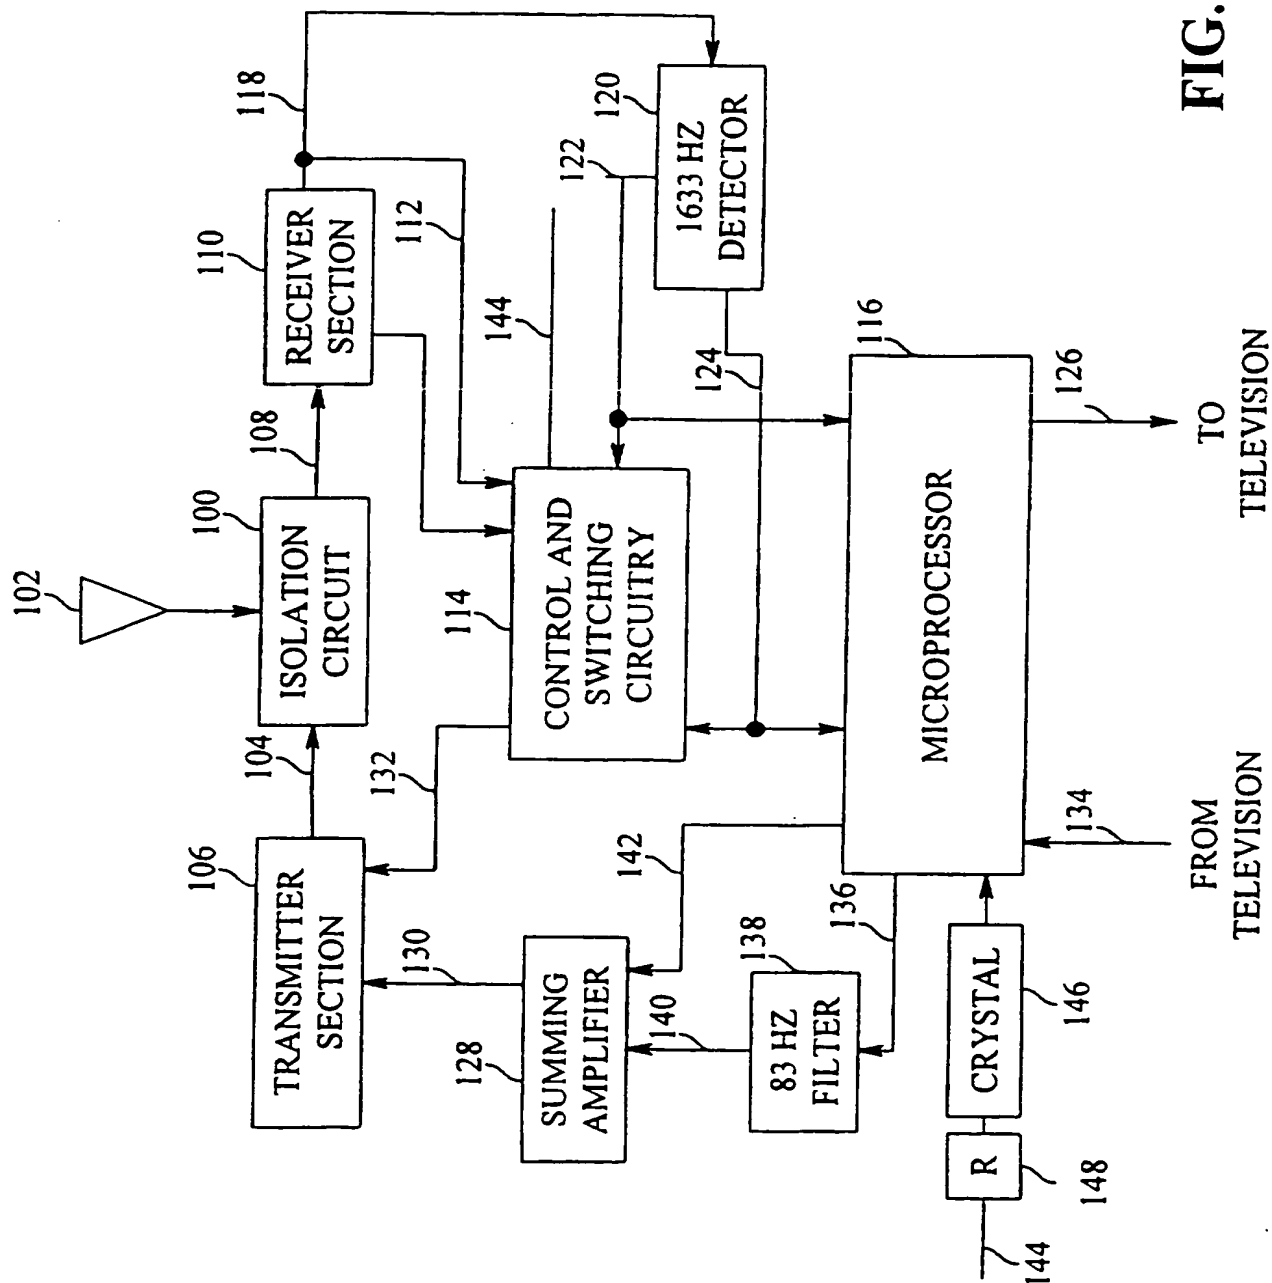
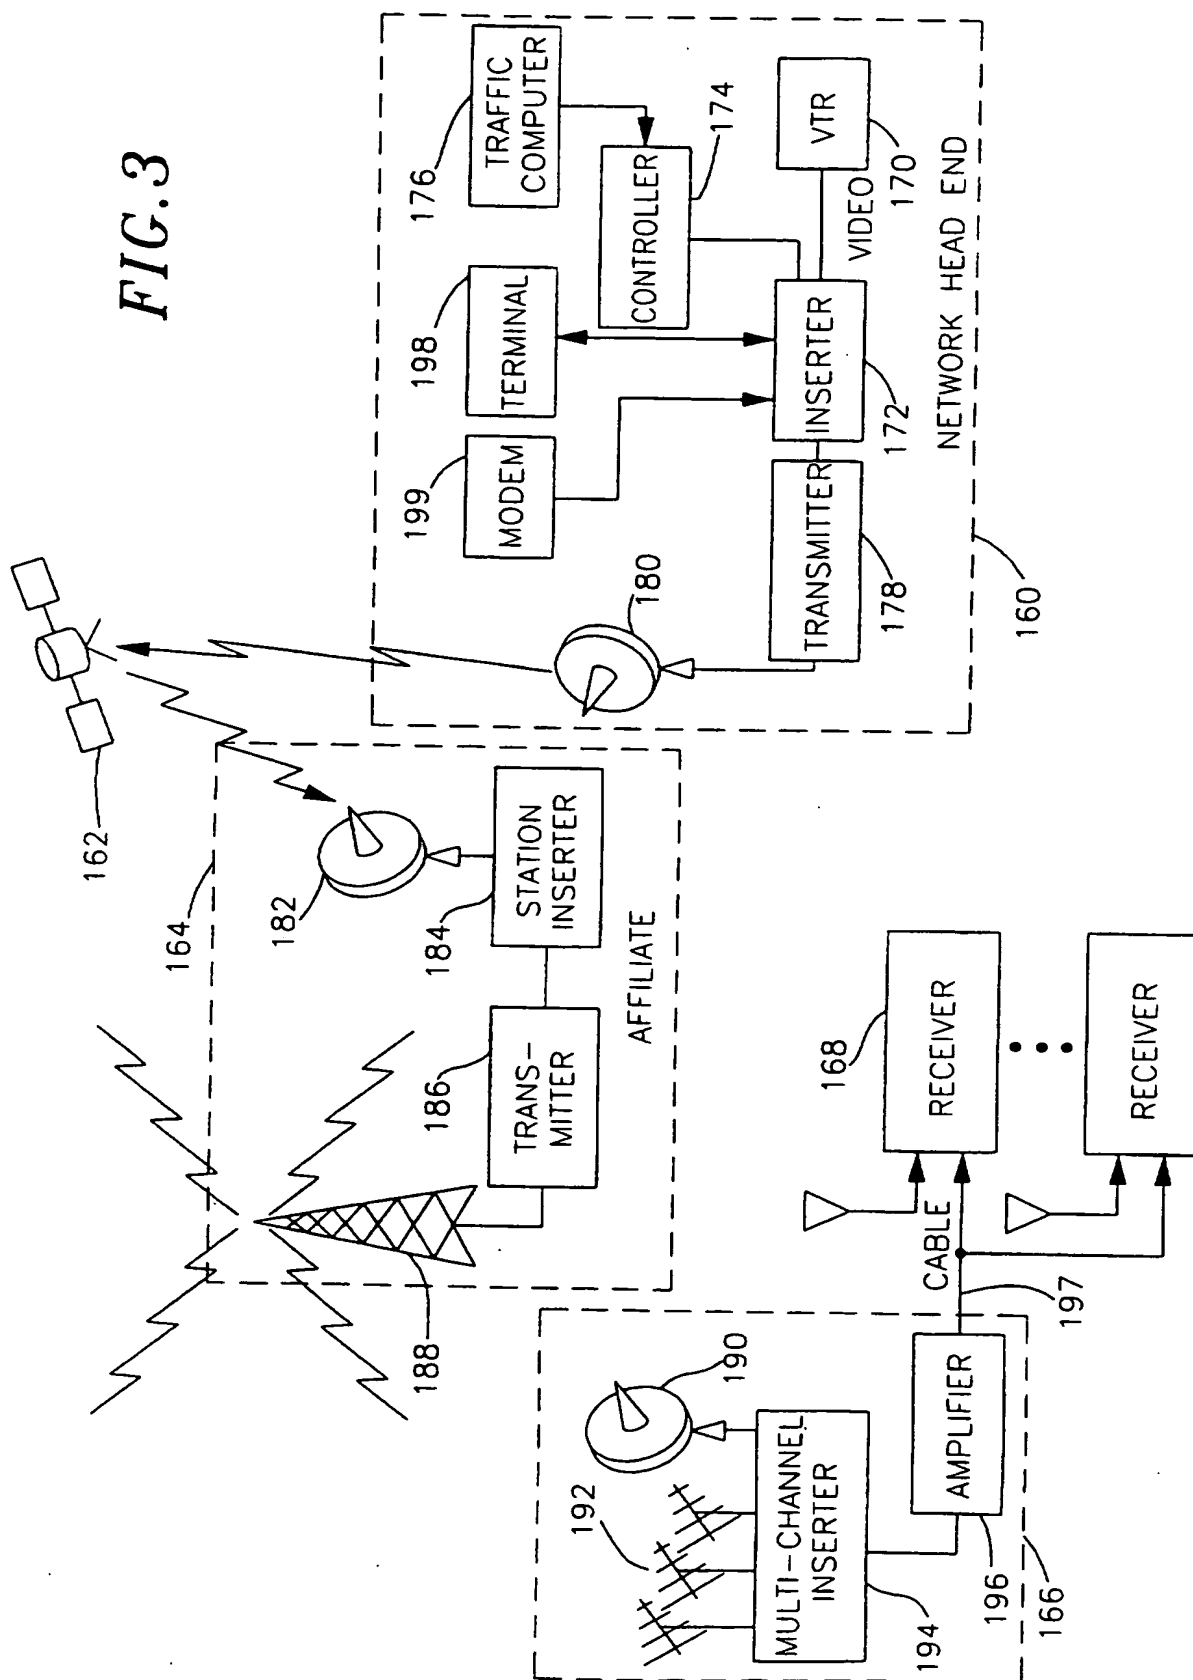


FIG. 2

**FIG. 3**



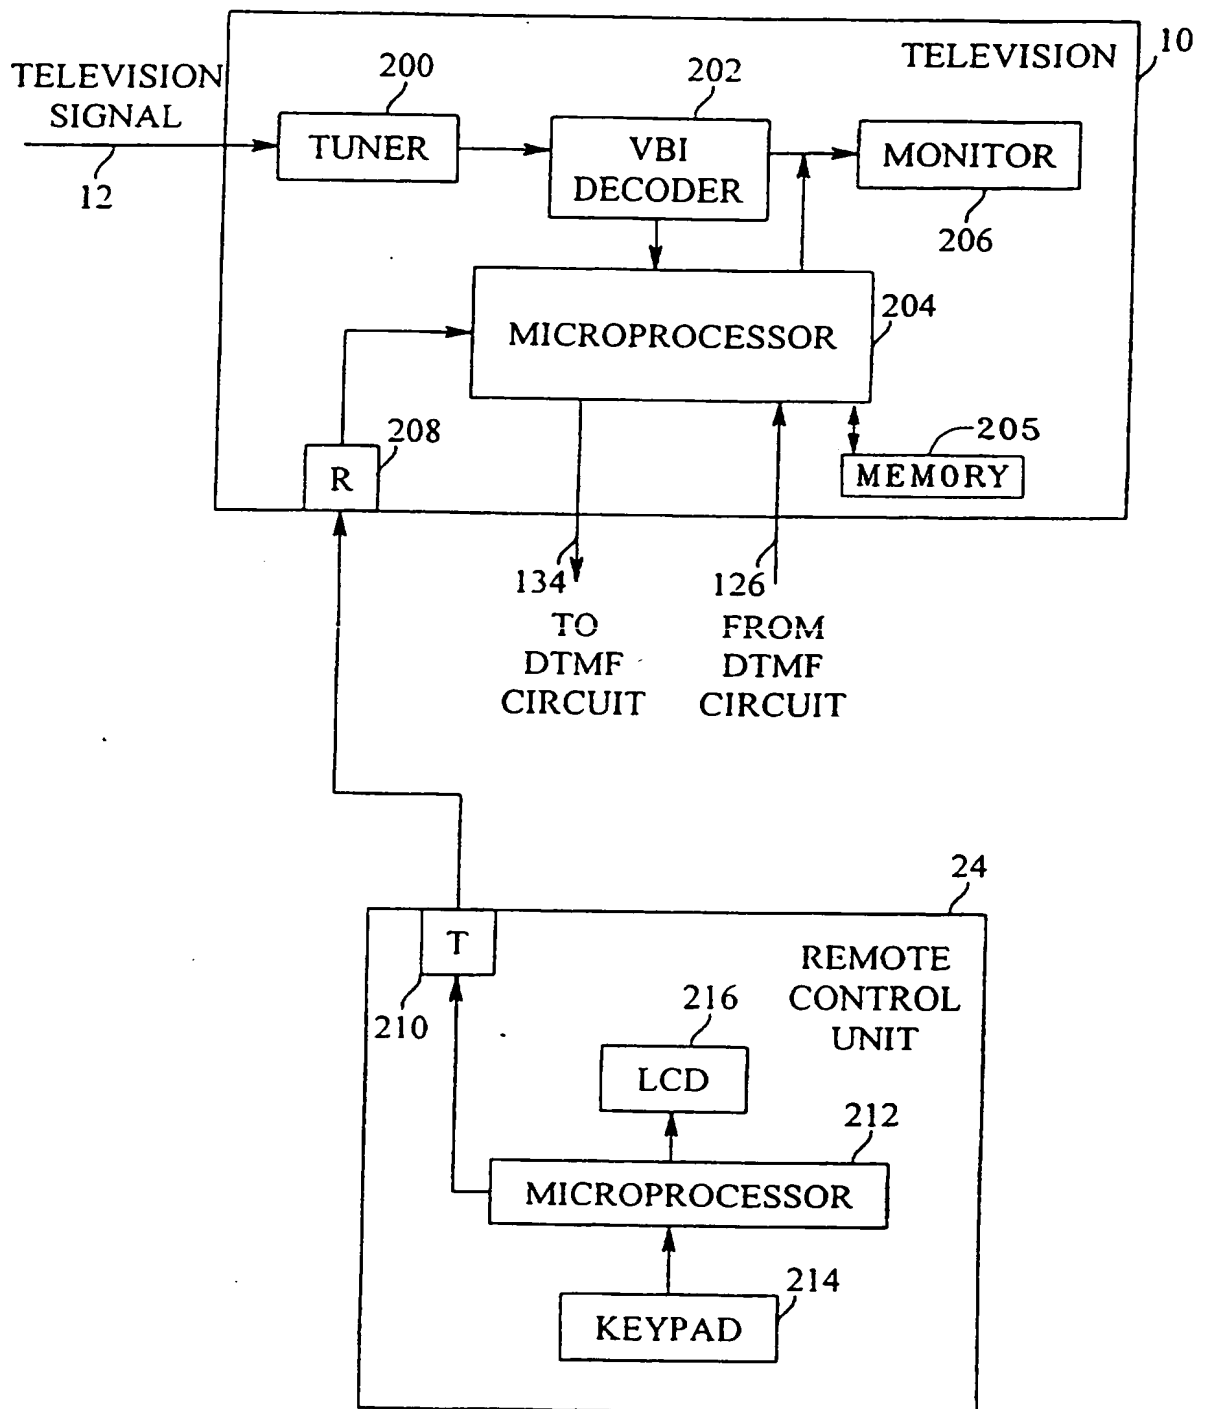
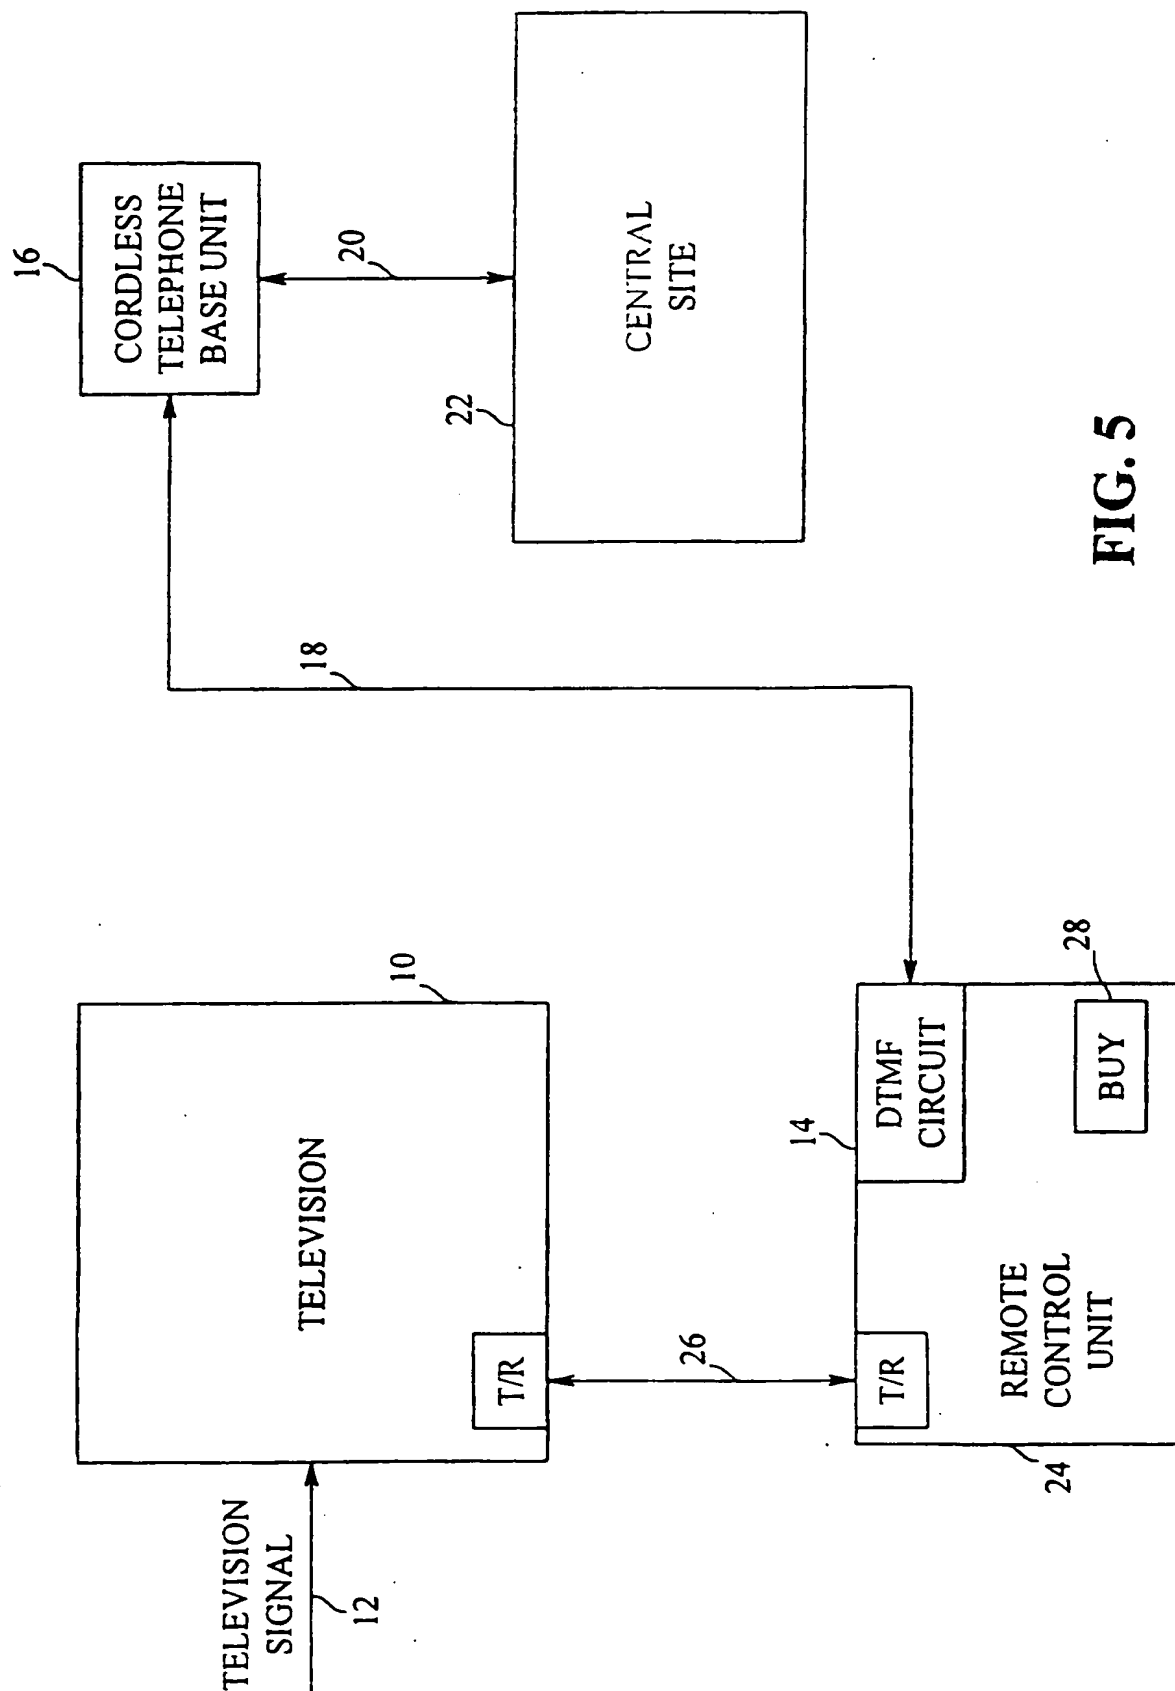


FIG. 4

5/7



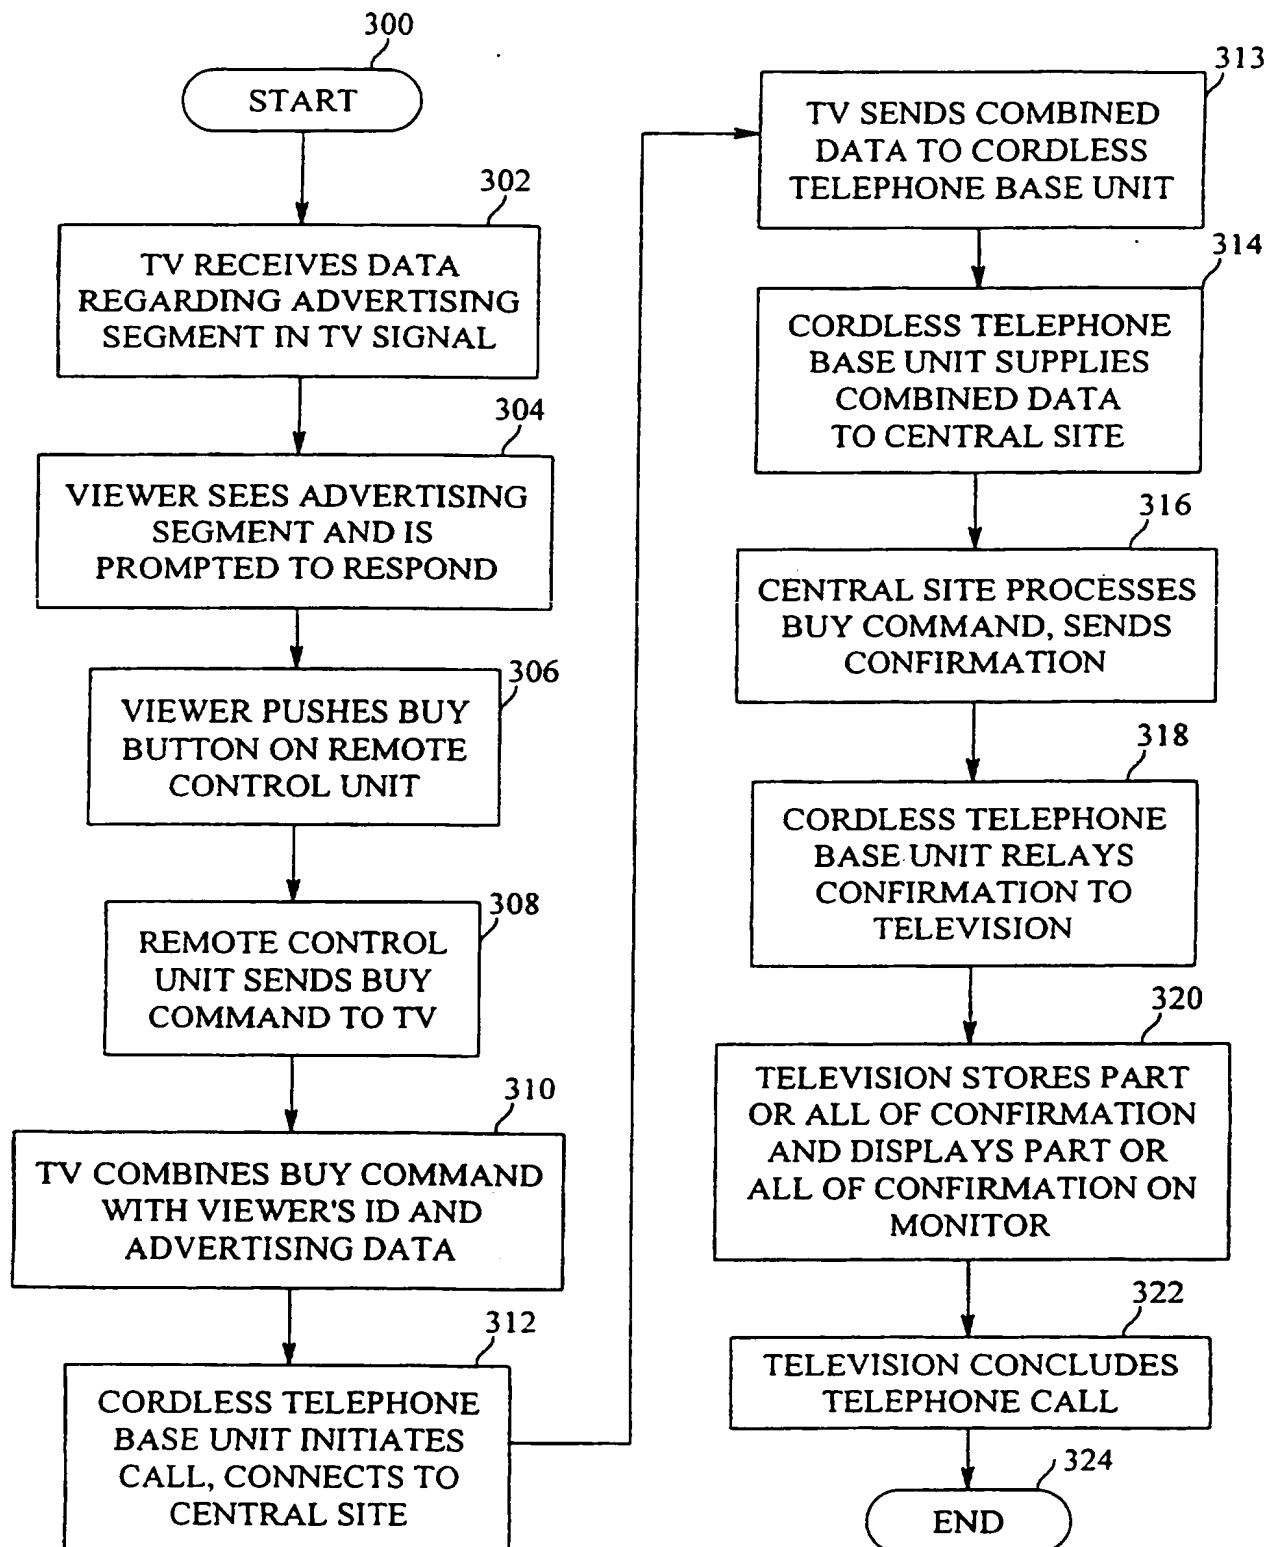
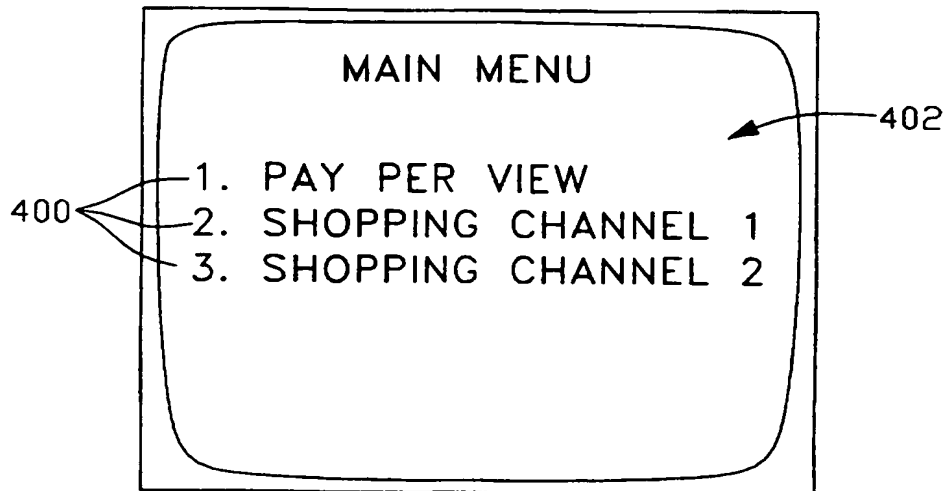
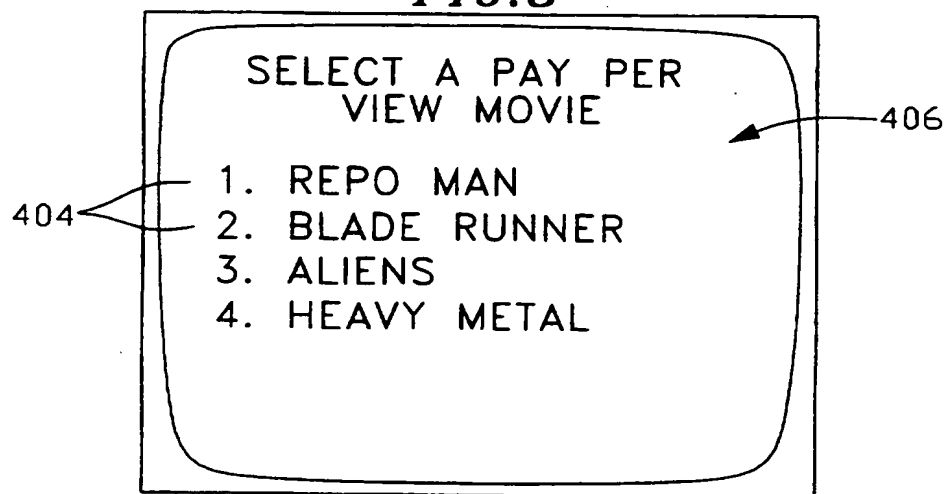
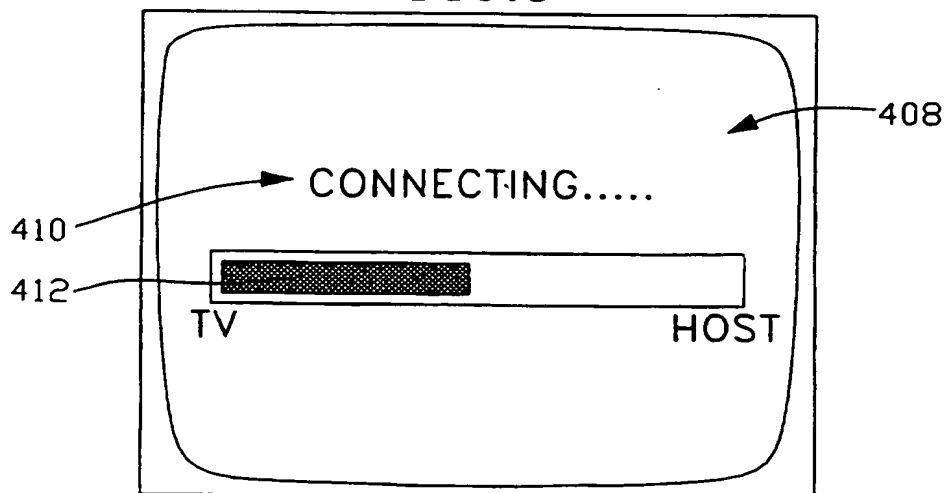


FIG. 6

**FIG. 7****FIG. 8****FIG. 9**

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/02888

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04N 7/10, 7/00

US CL : 348/7, 10, 13, 12, 734

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/7, 10, 13, 12, 734

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS - interactive, two-way, bi-directional, tele-phone, remote-control, dtmf, television, ppv, pay-per-view, vod, order, purchase, buy

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,014,125 A (POCOCK et al) 07 May 1991, col 2, lines 1-45, col 3, lines 65-68, col 6, lines 40-53, col 9, lines 22-68, col 10, lines 1-12, col 17, lines 3-28.	1 - 45
Y,P	US 5,570,415 A (STRETTON et al.) 29 October 1996, col 4, lines 15-34, fig 1.	1, 8, 9, 10, 14, 15, 16, 19, 20, 21, 23, 28, 31, 33, 36, 39, 45
Y,P	US 5,592,551 A (LETT et al) 07 January 1997, fig. 10-19.	37, 39, 40, 45

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T	later documents published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be part of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A*	document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means		
*P* document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

10 MAY 1997

Date of mailing of the international search report

09 JUN 1997

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

B. Srivastava  
VIVEK SRIVASTAVA

Telephone No. (703) 305 - 4038

Form PCT/ISA/210 (second sheet)(July 1992)\*